


- Ceph Configuration** ..... 1
- Ceph Runtime configuration*** ..... 1
- Setting a Specific Configuration Setting at Runtime*** ..... 1
- ..... 2



# Ceph Configuration

## Ceph Runtime configuration

```
# ceph daemon {daemon-type}.{id} config show
ex) ceph daemon osd.0 config show
```

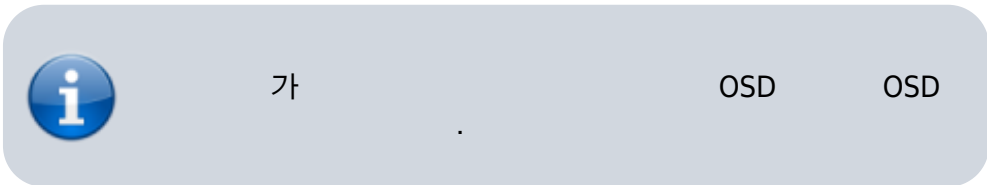

```
# ceph daemon {daemon-type}.{id} config get {parameter}
ex) ceph daemon osd.0 config get public_addr
```

## Setting a Specific Configuration Setting at Runtime

ceph 2가

1. Ceph Monitor
2. Administration Socket

tell injectargs Ceph

```
# ceph tell {daemon-type}.{daemon id or *} injectargs --{name} {value} [--
{name} {value}]
ex) ceph tell osd.0 injectargs '--debug-osd 0/5'
```

tell  
 --{config\_opt} {opt-val} 가 . daemon 가

ceph tell monitor 가

```
# sudo ceph osd.0 config set debug_osd 0/5
```

- [https://access.redhat.com/documentation/en-us/red\\_hat\\_ceph\\_storage/3/html/configuration\\_guide/configuration\\_reference](https://access.redhat.com/documentation/en-us/red_hat_ceph_storage/3/html/configuration_guide/configuration_reference)

From:

<http://allthatlinux.com/dokuwiki/> - **AllThatLinux!**

Permanent link:

[http://allthatlinux.com/dokuwiki/doku.php/ceph\\_configuration](http://allthatlinux.com/dokuwiki/doku.php/ceph_configuration)

Last update: **2018/08/03 11:48**

