


목차

Hypervisor 설치시 kickstart script 에러 원인과 해결방법	3
참조링크	4

Hypervisor 설치시 kickstart script 에러 원인과 해결방법

RHV/oVirt 4.x Baremetal Hypervisor 설치 시 파티션을 수동으로 생성하거나 했을때 설치 마지막 과정에서 스크립트 오류가 발생하는 경우가 있다.

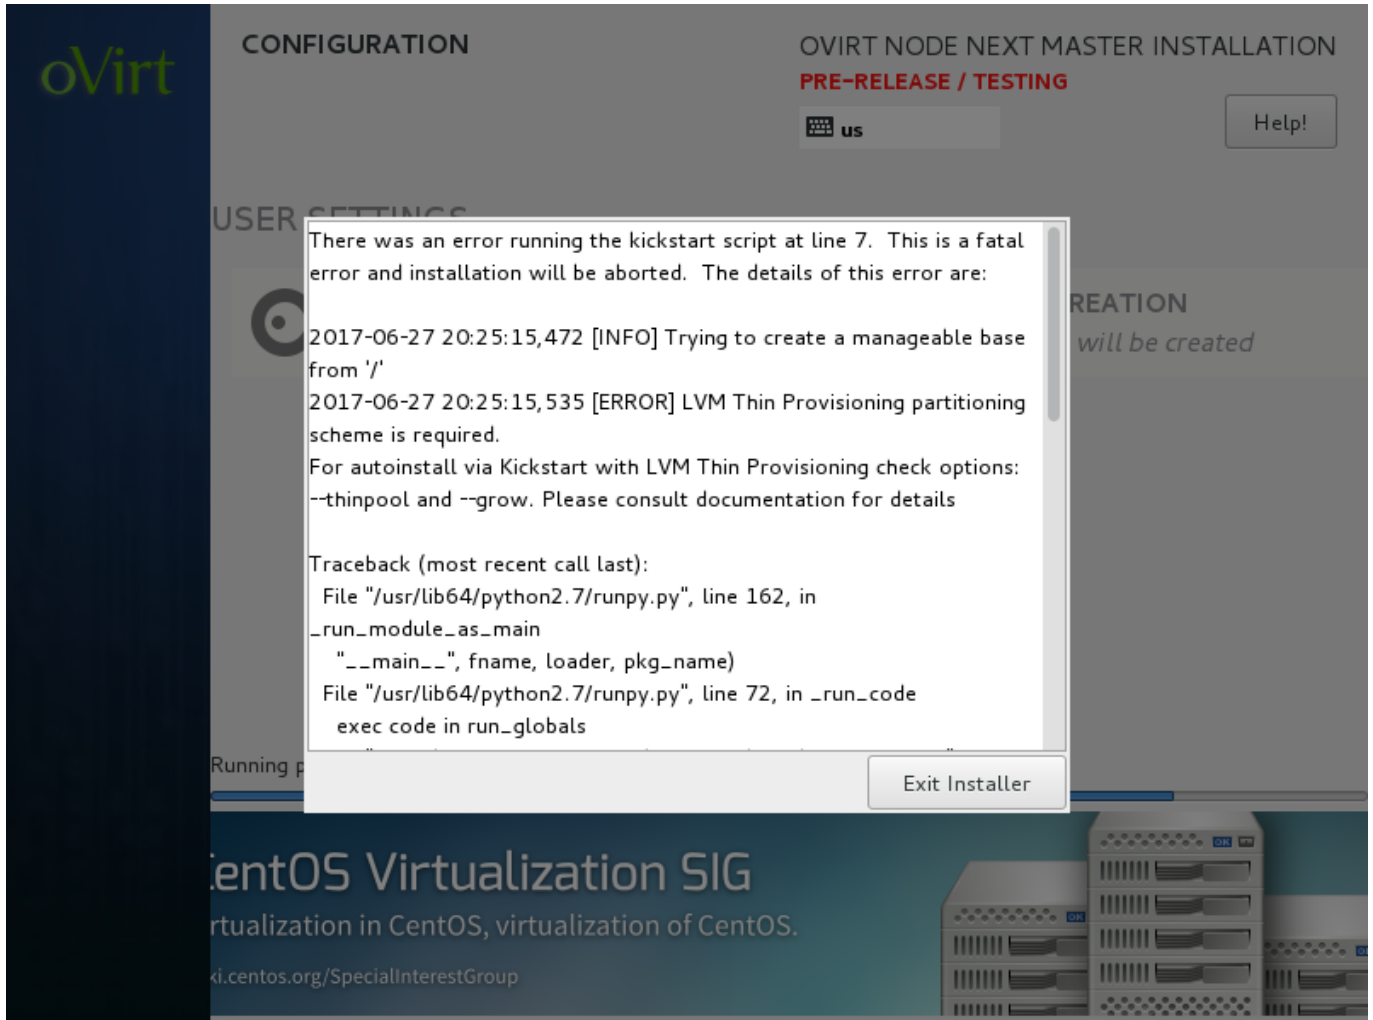

위와같이 오류 화면이 나타나면서 설치가 실패하는데 이 오류가 발생하는 원인은 파티셔닝을 잘못했기 때문이다.

[ovirt 공식 문서](#)에 따르면 아래쪽에 이런 부분이 있다.


Custom Partitioning Custom partitioning on oVirt Node is not recommended. Red Hat strongly recommends using the Automatically configure partitioning option in the Installation Destination window.

If your installation requires custom partitioning, note that the following restrictions apply:

- You must select the **LVM Thin Provisioning** option in the **Manual Partitioning** window.
- The root (/) directory must be on a thinly provisioned logical volume.
- The root (/) directory must be at least 6 GB.

- The /var directory must be on a separate volume or disk.
- Only XFS or Ext4 file systems are supported.

결론은 아래 그림처럼 LVM Thin Provisioning 을 선택하면 해결된다.

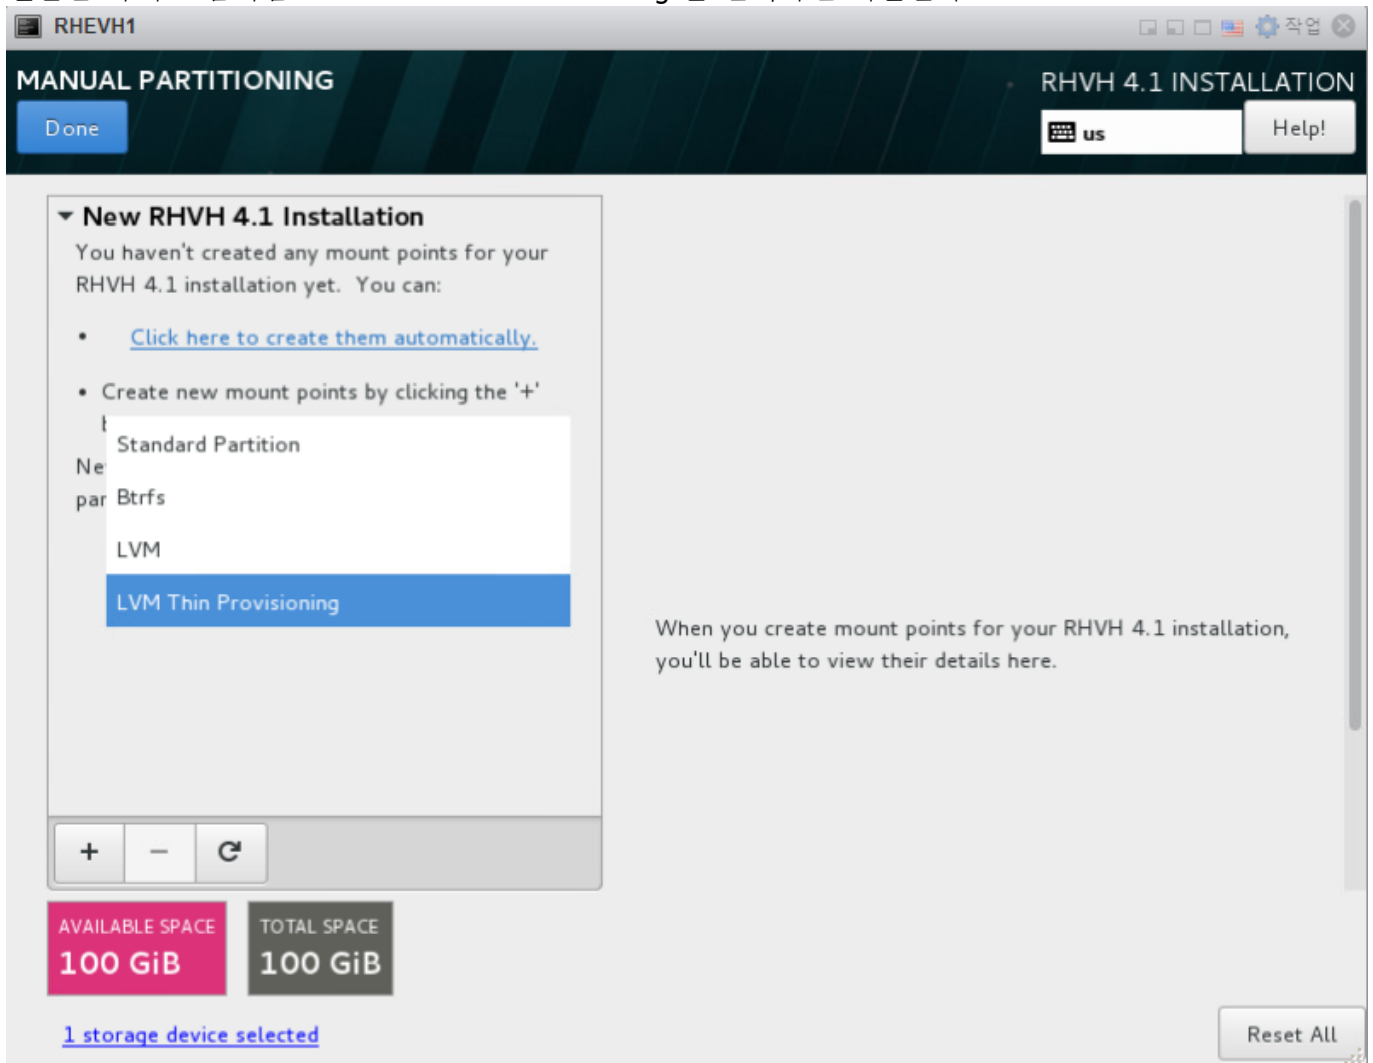

참조링크

- http://www.ovirt.org/documentation/install-guide/chap-oVirt_Nodes/#advanced-installation
- https://access.redhat.com/documentation/en-us/red_hat_virtualization/4.1/html/installation_guide/advanced_rhvh_install

From: <https://atl.kr/dokuwiki/> - AllThatLinux!

Permanent link: https://atl.kr/dokuwiki/doku.php/hypervisor_%EC%84%A4%EC%B9%98%EC%8B%9C_kickstart_script_%EC%97%90%EB%9F%AC_%EC%9B%90%EC%9D%B8%EA%B3%BC_%ED%95%B4%EA%B2%B0%EB%B0%A9%EB%B2%95

Last update: 2017/06/28 09:30

